


M² INTERLOCKING GRIP TOP TILES

- High quality, anti-skid & durable rubber floor tile
- 18mm Thick
- 1m x 1m with Interlocking Edge
- Very High density 6MPA Rubber
- Easy to lay and fit to size
- Interlocking connectable edges
- Attractive round studded surface on both sides
- Reversible for longer life expectancy
- Easy to wash down surface
- Can also be used in stables and walkways



43MM DOG BONE PAVERS

- Made from a heavy duty durable crumb rubber
- High Density for Heavy Usage
- Easy interlocking design for area coverage
- Can be bonded for heavy traffic areas
- Slip resistant finish
- High impact and resilience
- Excellent protection from falls
- Attractive 'paved' look design
- Easily replaced
- Available in Black, Red or Green

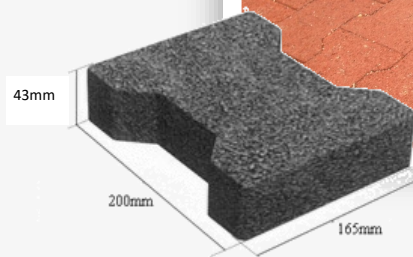

Equestrian • Agricultural • Gym • Play

Quattro Products Limited, Milestone House Ind Est, Penrith, Cumbria, CA11 9NQ


Tel: 01768864977 Email: enq@quattro rubber and resin.co.uk Web: www.quattro rubber and resin.co.uk



Horse Walkers

The Rubber & Resin Specialists

How to work out the area of a Horsewalker Walking Track in m²

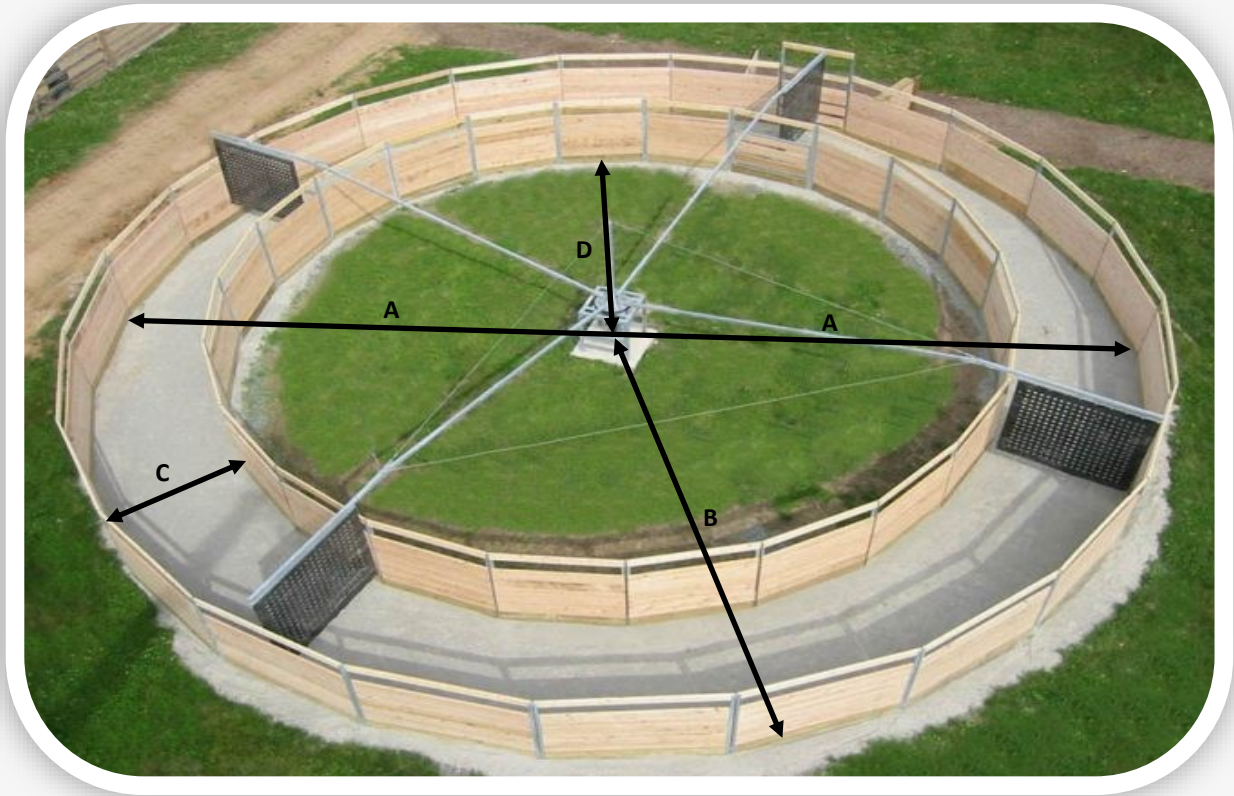

Divide the Diameter of Horsewalker (**A**) by 2 to get the Radius (**B**)

B x B x 3.14 = Full Area of the Horsewalker

Take away the Walking Track Width (**C**) from the Radius (**B**). This will give you the Radius of the Inner Circle (**D**)

D x D x 3.14 = Area of the Inner Circle

Full Area of the Horsewalker minus the Area of the Inner Circle = Area of the Walking Track

If this is done in feet and not metres divide the final measurement by 10.76 to get the square meterage



Equestrian • Agricultural • Gym • Play

Quattro Products Limited, Milestone House Ind Est, Penrith, Cumbria, CA11 9NQ

Tel: 01768864977 Email: enq@quattorrubberandresin.co.uk Web: www.quattorrubberandresin.co.uk

